


# TAYLOR CRANE & RIGGING VERSA-LIFT FORKLIFT PRINT

# 60-E

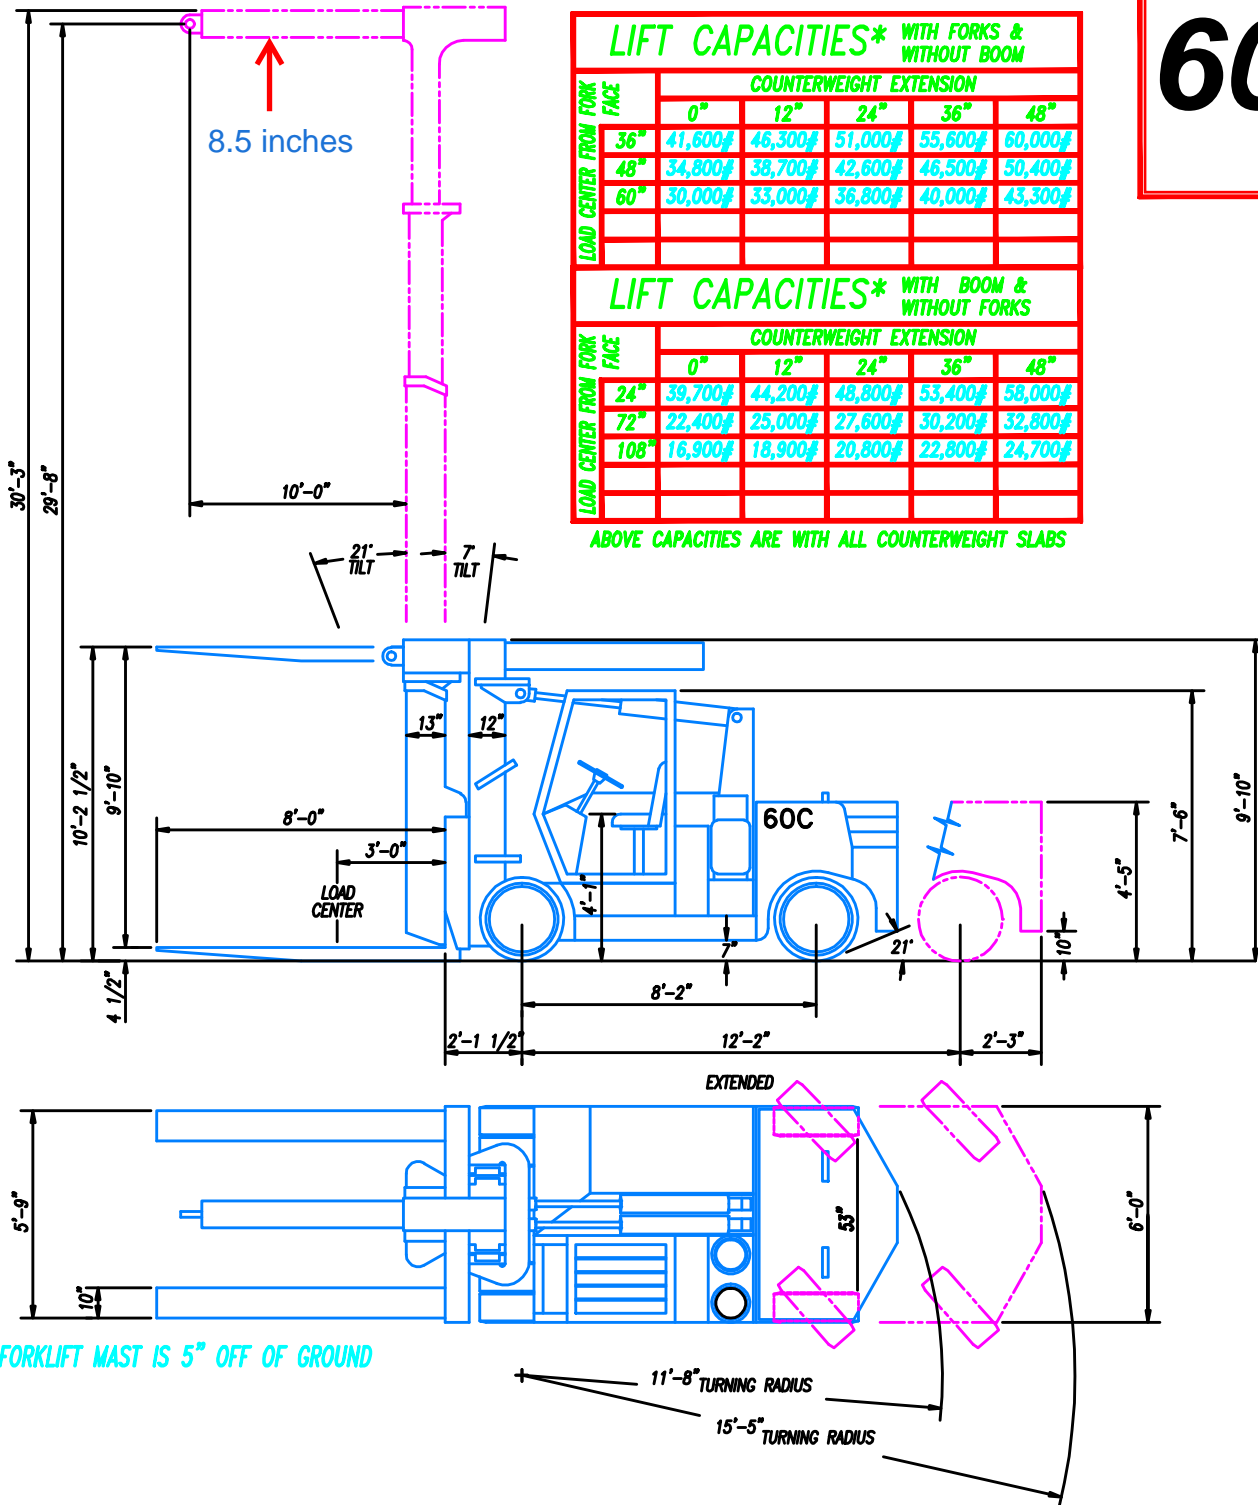

LIFT CAPACITIES* WITH FORKS & WITHOUT BOOM						
LOAD CENTER FROM FORK FACE	COUNTERWEIGHT EXTENSION					
	0"	12"	24"	36"	48"	
36"	41,600#	46,300#	51,000#	55,600#	60,000#	
48"	34,800#	38,700#	42,600#	46,500#	50,400#	
60"	30,000#	33,000#	36,800#	40,000#	43,300#	

LIFT CAPACITIES* WITH BOOM & WITHOUT FORKS						
LOAD CENTER FROM FORK FACE	COUNTERWEIGHT EXTENSION					
	0"	12"	24"	36"	48"	
24"	39,700#	44,200#	48,800#	53,400#	58,000#	
72"	22,400#	25,000#	27,600#	30,200#	32,800#	
108"	16,900#	18,900#	20,800#	22,800#	24,700#	

\* ABOVE CAPACITIES ARE WITH ALL COUNTERWEIGHT SLABS

FORKLIFT MAST IS 5" OFF OF GROUND

LOWERED HEIGHT @ FORWARD TILT LIMIT IS 8'-10 1/2"

UNIT NO:	60C	ENGINE:	CONTINENTAL TM27	FORKLIFT WEIGHTS WITH COUNTERWEIGHT (LBS.)	
CAP. 3' L/C:	60,000 LBS.	FUEL:	GASOLINE/LP-GAS	WITH BOOM AND FORKS	57,000
MAKE:	VERSA-LIFT	TRANS.:	SUNDSTRAND HYDROSTATIC	WITH FORKS & WITHOUT BOOM	51,500
MODEL:	40/60	DRIVE TIRES:	28X10X22 POLY. DUAL	WITH BOOM & WITHOUT FORKS	54,000
SERIAL NO.:	02456	STEER TIRES:	28X10X22 POLY.	WITHOUT BOOM AND FORKS	48,500
YEAR:	2008	DRIVE AXLE:	ROCKWELL PLANETARY DRIVE	COUNTERWEIGHT WEIGHT	15,000

**WEIGHTS AND FLOOR LOADINGS**

**VERSA-LIFT 40/60 E( F "WITH BOOM AND FORKS**

FRONT TRACK-	52"
REAR TRACK -	62"
OVERALL WIDTH -	72"
WHEELBASE EXTENDS -	98" TO 146"

**WEIGHTS (BOOM AND FORKS INCLUDED)**

		FRAME OUT	FRAME IN
	NO LOAD	(60,000# LOAD)	(40,000# LOAD)
WEIGHT ON DRIVE AXLE -	27,000#	112,000#	92,000#
WEIGHT ON STEER AXLE -	31,000#	6,000#	6,000#
TOTAL WEIGHT -	58,000#	118,000#	98,000#

**FLOOR LOADING WITH POLY TIRES**

	EST. GROUND PRESSURE	EST. FOOTPRINT (per wheel)
FLOOR LOADING - EMPTY	381 psi ON STEER	41.94 square inches each
FLOOR LOADING - LOADED		
60,000# AT 36" LOAD CENTER	643 psi ON DRIVE	87.06 square inches each

## 40/60 C&D Versa-Lift with 0 Counterweight Slabs

Slab Weight (lbs)  
3750

Number of Slabs  
0

Standard Wheel Base  
98

		<b>Lift Capacities w/Forks Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Fork Face (in)</b>	36	22100	24400	26800	29100	31400
	48	18500	20500	22400	24300	26300
	60	15900	17600	19200	20900	22600
	72	14000	15400	16900	18300	19800
	84	12400	13700	15000	16300	17600

		<b>Lift Capacities w/Boom Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	20500	22700	25000	27300	29600
	36	17200	19100	21000	22900	24800
	48	14800	16400	18100	19700	21400
	60	13000	14400	15900	17300	18800
	72	11600	12900	14100	15400	16700

		<b>Lift Capacities w/Boom &amp; Forks (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	19100	21400	23700	25900	28200
	36	16000	18000	19900	21800	23700
	48	13800	15500	17100	18700	20400
	60	12100	13600	15000	16500	17900
	72	10800	12100	13400	14700	16000

\*\*\*All Load Capacities are Rated with the Mast Vertical

## 40/60 C&D Versa-Lift with 1 Counterweight Slabs

Slab Weight (lbs)  
3750

Number of Slabs  
1

Standard Wheel Base  
98

		<b>Lift Capacities w/Forks Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Fork Face (in)</b>	36	27000	29900	32800	35700	38600
	48	22600	25000	27400	29900	32300
	60	19400	21500	23600	25700	27800
	72	17000	18900	20700	22500	24300
	84	15200	16800	18400	20100	21700

		<b>Lift Capacities w/Boom Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	25300	28100	31000	33800	36700
	36	21200	23600	26000	28400	30800
	48	18300	20300	22400	24400	26500
	60	16000	17800	19600	21500	23300
	72	14300	15900	17500	19100	20700

		<b>Lift Capacities w/Boom &amp; Forks (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	23900	26800	29600	32500	35300
	36	20100	22500	24900	27200	29600
	48	17300	19300	21400	23500	25500
	60	15200	17000	18800	20600	22400
	72	13500	15100	16800	18400	20000

*\*\*\*All Load Capacities are Rated with the Mast Vertical*

## 40/60 C&D Versa-Lift with 2 Counterweight Slabs

Slab Weight (lbs)  
3750

Number of Slabs  
2

Standard Wheel Base  
98

		<b>Lift Capacities w/Forks Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Fork Face (in)</b>	36	31900	35400	38900	42300	45800
	48	26700	29600	32500	35400	38300
	60	22900	25400	27900	30500	33000
	72	20100	22300	24500	26700	28900
	84	17900	19900	21800	23800	25700

		<b>Lift Capacities w/Boom Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	30100	33500	36900	40300	43800
	36	25200	28100	31000	33800	36700
	48	21700	24200	26700	29100	31600
	60	19100	21200	23400	25600	27800
	72	17000	18900	20900	22800	24800

		<b>Lift Capacities w/Boom &amp; Forks (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	28700	32200	35600	39000	42400
	36	24100	27000	29800	32700	35600
	48	20800	23200	25700	28200	30700
	60	18200	20400	22600	24700	26900
	72	16200	18200	20100	22100	24000

*\*\*\*All Load Capacities are Rated with the Mast Vertical*

## 40/60 C&D Versa-Lift with 3 Counterweight Slabs

Slab Weight (lbs)  
3750

Number of Slabs  
3

Standard Wheel Base  
98

		<b>Lift Capacities w/Forks Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Fork Face (in)</b>	36	36800	40800	44900	49000	53000
	48	30800	34200	37600	41000	44400
	60	26400	29400	32300	35200	38100
	72	23200	25800	28300	30900	33500
	84	20700	22900	25200	27500	29800

		<b>Lift Capacities w/Boom Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	34900	38900	42900	46900	50900
	36	29200	32600	36000	39300	42700
	48	25200	28100	31000	33900	36800
	60	22100	24700	27200	29700	32300
	72	19700	22000	24200	26500	28800

		<b>Lift Capacities w/Boom &amp; Forks (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	33500	37500	41500	45500	49500
	36	28100	31500	34800	38200	41600
	48	24200	27100	30000	32900	35800
	60	21300	23800	26400	28900	31400
	72	19000	21200	23500	25800	28000

\*\*\*All Load Capacities are Rated with the Mast Vertical

## 40/60 C&D Versa-Lift with 4 Counterweight Slabs

Slab Weight (lbs)  
3750

Number of Slabs  
4

Standard Wheel Base  
98

		<b>Lift Capacities w/Forks Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Fork Face (in)</b>	36	41600	46300	51000	55600	60300
	48	34800	38700	42600	46500	50400
	60	30000	33300	36600	40000	43300
	72	26300	29200	32100	35100	38000
	84	23400	26000	28600	31200	33800

		<b>Lift Capacities w/Boom Only (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	39700	44200	48800	53400	58000
	36	33300	37100	41000	44800	48600
	48	28700	32000	35300	38600	41900
	60	25200	28100	31000	33900	36800
	72	22400	25000	27600	30200	32800

		<b>Lift Capacities w/Boom &amp; Forks (lbs)</b>				
		Counter Weight Extension (in)				
		0	12	24	36	48
<b>Load Center From Boom Face (in)</b>	24	38300	42900	47500	52100	56600
	36	32200	36000	39800	43700	47500
	48	27700	31000	34300	37600	40900
	60	24300	27200	30100	33000	35900
	72	21700	24300	26900	29400	32000

\*\*\*All Load Capacities are Rated with the Mast Vertical

# LONG BOOM INSERT LOAD CHART

## 40/60 Versa-Lift with 4 Counterweight Slabs

With 30358 Long Horz. Boom & 31022 Insert

Slab Weight (lbs)  
3750

Number of Slabs  
4

Standard Wheel Base  
98

		Lift Capacities w/Forks Only (lbs)				
		Counter Weight Extension (in)				
		0	12	24	36	48
Load Center From Fork Face (in)	36	41600	46300	51000	55600	60300
	48	34800	38700	42600	46500	50400
	60	30000	33300	36600	40000	43300
	72	26300	29200	32100	35100	38000
	84	23400	26000	28600	31200	33800

		Lift Capacities w/Boom Only (lbs)				
		Counter Weight Extension (in)				
		0	12	24	36	48
Load Center From Boom Face (in)	24	39700	44200	48800	53400	58000
	36	33300	37100	41000	44800	48600
	48	28700	32000	35300	38600	41900
	60	25200	28100	31000	33900	36800
	72	22400	25000	27600	30200	32800
	84	20200	22600	24900	27200	29600
	96	18400	20600	22700	24800	26900
	108	16900	18900	20800	22800	24700
	120	15600	17400	19200	21000*	21000*
	132	14500	16200	17900	19100*	19100*
	144	13600	15200	16700	17500*	17500*
	156	12700	14200	15700	16200*	16200*
168	12000	13400	14800	15000*	15000*	
180	11300	12700	14000	14000*	14000*	

\* Capacity Controlled by Structural Limitations

		Lift Capacities w/Boom & Forks (lbs)				
		Counter Weight Extension (in)				
		0	12	24	36	48
Load Center From Boom Face (in)	24	38300	42900	47500	52100	56600
	36	32200	36000	39800	43700	47500
	48	27700	31000	34300	37600	40900
	60	24300	27200	30100	33000	35900
	72	21700	24300	26900	29400	32000

\*\*\*All Load Capacities are Rated with the Mast Vertical